
‘WOOD-EFFECT’ CEMENT TILES

Mimbre cement tile

Wooden surfaces are not as resistant to mechanical damage as cement tiles, which is why our MIMBRE tiles are the ideal solution.

DECORATIVE CEMENT TILE (WOOD, WICKER, PATTERNS)

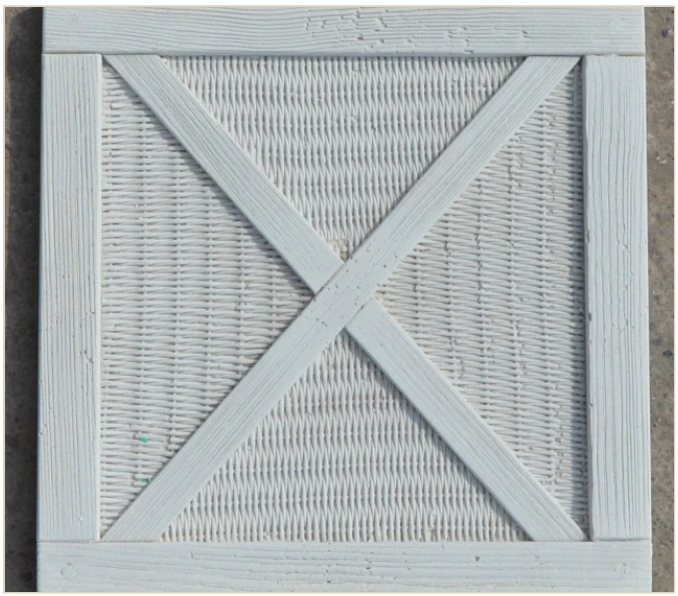

IDENTIFICATION

Dartank reference	**D11CB04**
Dartank EAN	**3701839359143**
Material	**Decorative cement tile (wood, wicker, patterns)**
Colors	**Blanc**
Sales unit	**Piece**

OVERVIEW

Overview

The warmth of wood or the texture of wicker with the durability of cement: combinable formats for a natural effect, from living room to façade.

KEY BENEFITS

01
Faithfully reproduces the colour and grain of wood

02
Durable cement material without heavy maintenance

03
Combinable formats for a natural look

04
Interiors, wet rooms and façades

05
Low thickness (approx. 2 to 2.5 cm)

06
Wood, wicker and graphic effects

THE MATERIAL

Decorative cement tile (wood, wicker, patterns)

Cement wall tiles reproducing the colour and grain of wood, woven wicker or graphic patterns, for interiors and façades.

Composition	**Moulded cement-based element**
Manufacturing	**Hand-crafted, hand-moulded**
Use	**Living room, kitchen, bathroom and outdoor façade**
Thickness	**20–25 mm env.**
Cutting	**Stone or concrete cutting disc, or score the face and snap for a more natural edge**
Recommended cutting allowance	**3 % env.**

PERFORMANCE AND TEST RESULTS

Property	Standard	Result
Weather resistance		**Resists temperature changes, moisture, rain and UV (outdoor version)**

INSTALLATION

Installation

1. **Substrate** Dry, degreased, clean substrate free of loose parts, then primed.
2. **Movement joints** Repeat every wall movement joint with a joint in the cladding at the same place.
3. **Bonding** Choose the tile adhesive for the use: indoor or outdoor, wall or floor, fireplace wall, kitchen or bathroom.
4. **Cutting** Cut with a stone/concrete disc, or score the face and snap for a natural-looking edge.
5. **Grouting** Grout with a mortar matching the colour; one slip collection can be laid without joints.
6. **Impregnation** Impregnate after laying and grouting, once the grout has cured for at least 24 h; recommended outdoors, in kitchens, bathrooms, on fireplace walls and in hallways.

COLOURS AND OPTIONS

Colors

- Blanc

> **WARNING**
>
> Hand-moulded product: each piece varies in relief and shade. Mix pieces from several boxes when laying.

Non-contractual document. Values are given for guidance; official documents are available on request.