
BESPOKE SKIRTING BOARDS

LED shelf D8PL136 SET

LED shelf SET

POLYSTYRENE-CORE PLASTERBOARD

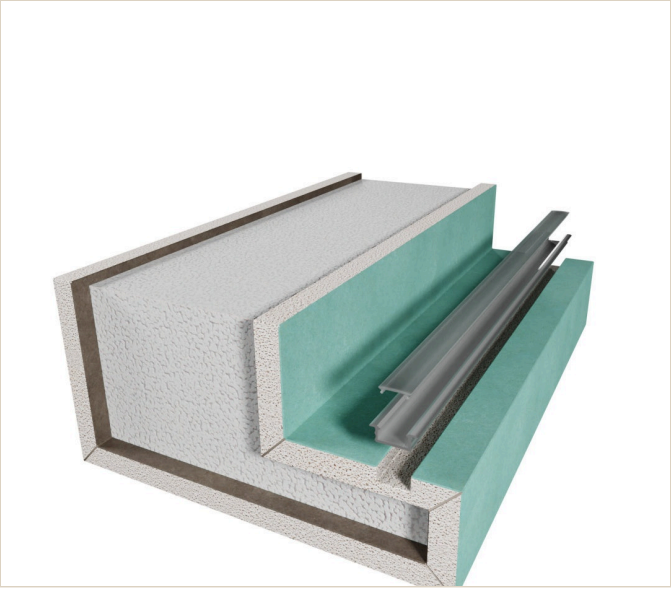

IDENTIFICATION

Dartank reference	**D8PL136**
Dartank EAN	**3701839304129**
Material	**Polystyrene-core plasterboard**
Thickness	**20 cm**
Sales unit	**Piece**

OVERVIEW

Overview

Ready-to-fit plasterboard modules that blend into the wall like built work: invisible taped joints, finish of your choice, optional LED lighting.

KEY BENEFITS

01
Built-in look
Invisible taped joints, a built-work finish.

02
Any finish
Paint, render, wallpaper or tiles.

03
Ready to fit
Prefabricated modules, trimmable with a saw.

04
Secure fixing
Metal brackets, adhesive and screws.

05
LED-ready
Versions designed to take an LED strip.

06
Forgiving
Absorbs substrate deviations up to 10 mm.

THE MATERIAL

Polystyrene-core plasterboard

Prefabricated plasterboard elements on a polystyrene core: skirting, profiles, slats, curtain pelmets and lit trims, to be painted, rendered, papered or tiled.

Application	**Interior**
Composition	**Plasterboard on a polystyrene core**
Plasterboard thickness	**12.5 mm**
Installation method	**Metal brackets, gypsum adhesive in dabs every 15 cm and side screwing**
Compatible paints	**Solvent-free water-based paint**
Possible finishes	**Paint, decorative render, wallpaper or tiles**

INSTALLATION

Installation

1. **1. Prepare** Unpack the modules, remove film and inserts. Trim with a saw if needed and lightly sand the edges. Prime the wall.
2. **2. Mark out** Offer up the modules and mark the lines, allowing for the board thickness (12.5 mm).
3. **3. Fix brackets** Screw the metal brackets to the wall (U for boxes, L for others): one at each joint and at least one per side every 2 m.
4. **4. Bond and screw** Apply gypsum adhesive in dabs every 15 cm on the core, press the module onto the brackets, adjust and screw from the side (screws not supplied).
5. **5. Joints** Bond the core edges between modules, tape the joints (non-woven tape and flexible jointing compound), sand. Small deviations up to 10 mm can be corrected.
6. **6. Finish** Paint, render, paper or tile the surface.

MAINTENANCE

Care and maintenance

Routine	**No special maintenance. Dust with a broom or a vacuum cleaner fitted with a clean soft brush.**
Lacquered surfaces	**Versions with a factory lacquer finish can be cleaned with a damp cloth, water or an alcohol-free cleaner.**

QUANTITIES

VARIANTS — 12

VARIANT	REF.
Etagère LED D8ML302 5cm	D8ML302
Etagère LED D8TG01	D8TG01
Etagère LED D8TG08	D8TG08
Etagère LED D8TG09	D8TG09
Etagère LED D8TG10	D8TG10
Etagère LED D8TG11	D8TG11
Etagère LED D8TG13	D8TG13
Etagère LED D8PL131	D8PL131
Ensemble étagère LED en plaque de plâtre	D8PL135
Etagère LED D8PL133	D8PL133
Etagère LED D8PL134 5cm	D8PL134
Etagère LED D8PL132	D8PL132

WARNING

Solvent-based paints are prohibited: use a water-based paint. Do not use silicone sealant at junctions.

Non-contractual document. Values are given for guidance; official documents are available on request.