
3D PLASTER WALL PANELS

Decorative wall panel D6PA247P - Box of 6.84 m² (15 pieces)

Material: PVC. Thickness: 0,04 cm.

THERMOFORMED 3D PVC | PVC

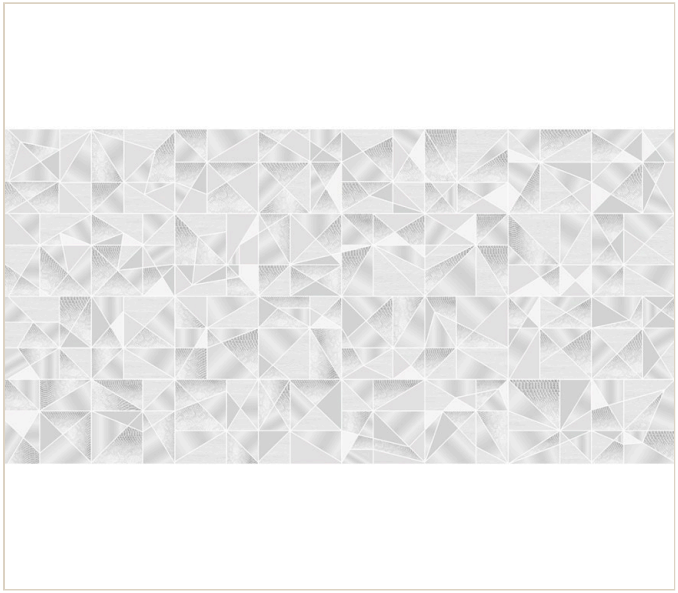

IDENTIFICATION

Dartank reference	**D6PA247P**
Dartank EAN	**3701839314142**
Material	**Thermoformed 3D PVC**
Thickness	**0.04 cm**
Packaging	**Carton de 6,84 m² (15 pièces)**
Sales unit	**Square metre (m²)**

OVERVIEW

Overview

Very light, waterproof thermoformed PVC decorative wall panels with a 2–7 mm 3D relief. They are bonded to interior walls without drilling.

KEY BENEFITS

01
Waterproof
Moisture-proof PVC.

02
Ultra-light
About 0.2 kg per panel.

03
Distinct relief
3D embossing of 2 to 7 mm.

04
No drilling
Quick bonded installation.

05
Hides defects
Covers small wall irregularities.

06
Wide choice
Many decorative patterns in the catalogue.

PRODUCT CHARACTERISTICS

Material	**PVC**
Height	**48.5 cm**
Width	**96 cm**

THE MATERIAL

Thermoformed 3D PVC

Thin thermoformed PVC wall panels with 3D relief, waterproof, bonded in place.

Material	**PVC**
Use	**Interior**
Thickness	**0.4 mm**
Relief depth	**2–7 mm**
Weight per piece	**0.2–0.2 kg**
Installation method	**Bonded, no drilling**
Installation temperature	**≥ 8 °C**

PERFORMANCE AND TEST RESULTS

Property	Standard	Result
Water resistance		**Waterproof**

INSTALLATION

Installation

1. **Substrate** Smooth, clean and dry; the thin panel tolerates small irregularities.
2. **Bonding** Apply the recommended mounting adhesive (available in our catalogue) to the back, press and hold 20 seconds; adjust before it sets.
3. **Joints** Slightly overlap the edge of one panel onto the next.
4. **Conditions** Installation temperature of at least +8 °C.

QUANTITIES

COVERAGE PER M² — 8% cutting waste

AREA	BILLED
5 m²	5.4 m²
10 m²	10.8 m²
20 m²	21.6 m²
50 m²	54 m²

Non-contractual document. Values are given for guidance; official documents are available on request.