
ARTISTIC MOSAICS

Allumi Gold Hexagon 14

Allumi Gold Hexagon 14 is a decorative metal mosaic, matte finish.

DECORATIVE METAL | MÉTAL | INTÉRIEUR | COLLAGE

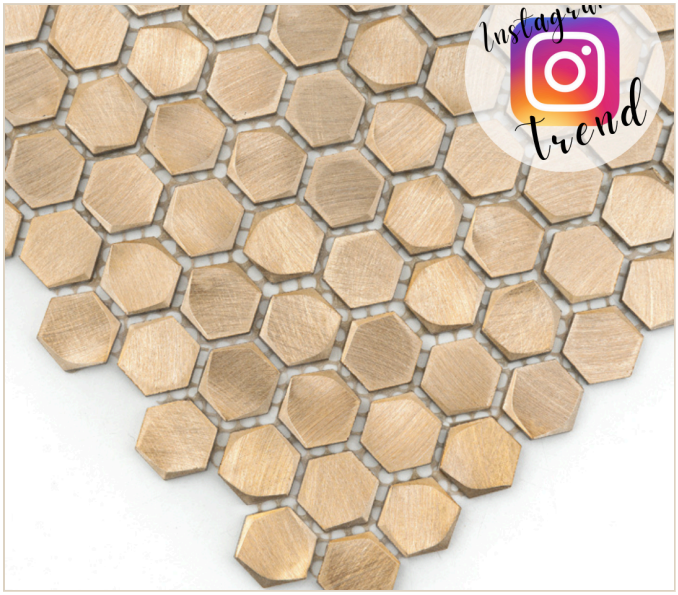

IDENTIFICATION

Dartank reference	**D4M18**
Dartank EAN	**3701839328378**
Material	**Decorative metal**
Colors	**Dore**
Format	**30×30 cm**
Thickness	**3 mm**
Pieces / m²	**11.11**
Sales unit	**Piece**

OVERVIEW

Overview

Matt metal tesserae in silver, brass gold or patina finishes: a graphic, luminous accent for splashbacks, bathrooms and feature walls.

KEY BENEFITS

01
Non-combustible
Class A1 reaction to fire.

02
Wet areas
Suitable even inside showers.

03
Frost resistant
Declared frost and thermal shock resistance.

04
Robust
700 N breaking strength.

05
Metal sheen
Contemporary brushed or patinated look.

06
Graphic shapes
Hexagons, pills, tabs, mixed mosaics.

PRODUCT CHARACTERISTICS

Material	**Métal**
Finish	**Mat**
Application	**Intérieur**
Installation	**collage**
Absorption	**0%**
Joint	**2 mm**
Weight	**0,55 kg**

THE MATERIAL

Decorative metal

Matt decorative metal mosaic (silver, brass gold, patina), for indoor walls.

Material	**Metal**
Indoor use	**Yes**

PERFORMANCE AND TEST RESULTS

Property	Standard	Result
Reaction to fire	EN 13501-1	**A1**
Water absorption		**0.11 % %**
Wet areas		**Suitable for areas directly exposed to water (shower, splashback)**
Thermal shock resistance		**Pass**
Breaking strength		**700 N**
Frost resistance		**Pass**

TECHNICAL DOCUMENTS

DoP

Declaration of performance

2025

On request

INSTALLATION

INSTALLER	SUBSTRATE	PRIMER	BATCH
Installation by a qualified professional, following good building practice.	Dry, flat, clean, degreased and dust-free.	Apply a primer with a roller or brush; in very humid rooms use a waterproofing primer.	Order the area for one room from a single batch and check quality, size and shade before installing.

Installation

1. **1** Cut with a hand saw, angle grinder with diamond blade or stainless steel blade; drill with a diamond metal bit. Plan the layout to limit cuts.
2. **2** Bond with a white, flexible, fine-grain adhesive.
3. **3** Remove the protective film before bonding.
4. **4** Spread the adhesive with a notched trowel (thickness per adhesive maker) in parallel ridges; lay into fresh adhesive pressing evenly. No spot bonding.
5. **5** Lay all sheets with the brushing (visible lines) in the same direction.
6. **6** Seal corners, wall/floor junctions and penetrations (taps) with a flexible joint (silicone, polymer) or a profile; follow substrate movement joints and use expansion profiles on large areas.
7. **7** Do not butt-joint: press the sheets onto the wall and separate them with spacers.
8. **8** Remove all adhesive from the surface, tools and hands; no residue may remain on the mosaic. Do not use for 24 h.
9. **9** Grout no earlier than 24 h after bonding with fine flexible grout for metal mosaic; finish with a damp cloth.
10. **10** Clean the surface with a clean damp sponge. Do not use for 24 h.

MAINTENANCE

Care and maintenance

Products	**Only stainless steel cleaners, or soapy water / alcohol-based cleaner.**
Avoid	**Steel wool, abrasive products; do not let cleaner dry, nor leave food, metal cans or hot pans in contact.**

QUANTITIES

VARIANTS — 1

VARIANT	REF.
Argent	D4M19

COLOURS AND OPTIONS

Colors

- Dore

Non-contractual document. Values are given for guidance; official documents are available on request.