
KITCHEN MOSAICS

Oak D4M322

Oak is a decorative wooden mosaic, Etn!k collection, matt finish.

SOLID WOOD | BOIS | INTÉRIEUR | COLLAGE

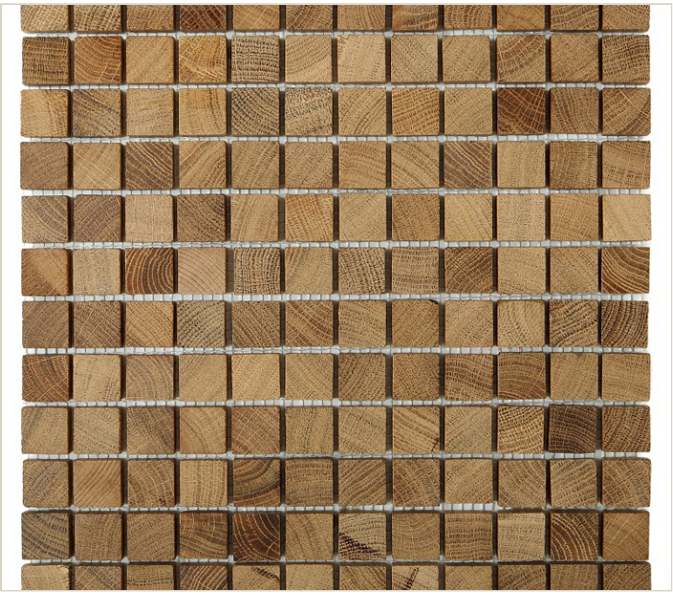

IDENTIFICATION

Dartank reference	**D4M322**
Dartank EAN	**3701839326800**
Material	**Solid wood**
Colors	**Beige**
Format	**31,7×31,7 cm**
Thickness	**7 mm**
Sales unit	**Piece**

OVERVIEW

Overview

Natural solid wood tesserae, oiled or varnished, bringing warmth and relief to indoor walls and floors. Each piece keeps the grain and shades of the species.

KEY BENEFITS

01
Solid wood
Natural material, each piece is unique.

02
Walls and floors
For indoor walls and floors.

03
Warmth and relief
Natural grain and three-dimensional effect.

04
Durable finish
Oiled or varnished, renewable by sanding.

05
Complete system
Dedicated adhesive, grout, solvent and oil.

06
Damp rooms
Usable in bathrooms and kitchens depending on finish.

PRODUCT CHARACTERISTICS

Material	**Bois**
Finish	**Mat**
Application	**Intérieur**
Installation	**collage**
Joint	**1,5 mm**
Element	**25×25 mm**
Weight	**0,5 kg**

THE MATERIAL

Solid wood

Natural solid wood mosaic, oiled or varnished, for indoor walls and floors.

Material	**Natural solid wood, impregnated early in production**
Dimensional tolerance	**± 2 mm (natural material, variations possible) mm**
Floor use	**Yes**

INSTALLATION

INSTALLER
Installation by a qualified professional, following good building practice.

ROOM CLIMATE
About 20 °C and 50 % relative humidity.

SUBSTRATE
Dry, flat, clean, degreased and dust-free.

PRIMER
Apply a primer with a roller or brush; in very humid rooms use a waterproofing primer.

BATCH
Order the area for one room from a single batch and check quality, size and shade before installing.

Installation

1. **1** Cut with a hand saw or jigsaw, then sand the edges; drill with a wood bit. Plan the layout to avoid cuts.
2. **2** Spread a dedicated fast-setting adhesive for wood mosaic with a notched trowel (max 3 mm teeth) and lay into fresh adhesive, no spot bonding; never use traditional tile adhesive or silicone.
3. **3** Do not butt-joint; separate sheets with spacers. Seal corners, junctions and penetrations with the dedicated flexible grout or a profile; respect movement joints.
4. **4** Immediately remove adhesive from surface, tools and hands (fast-setting; clean with solvent). Do not use for 24 h.
5. **5** Grout no earlier than 24 h later with the flexible wood-mosaic grout (never traditional mortar or silicone), in areas of max 0.5 m².
6. **6** Scrape off the excess with a rubber float and immediately clean residue with the dedicated solvent (or white spirit/cellulose thinner after testing), wearing gloves. Dried residue can only be removed by sanding (240 grit).
7. **7** Joints may be flush or recessed to highlight relief. Do not use for 48 h.
8. **8** Oiled mosaics only: clean, then apply impregnating oil with a cotton cloth or brush; next coat after 24 h; usable after 48 h. Do not oil varnished mosaics.

MAINTENANCE

Care and maintenance

Products	**Only wood-care products per their instructions; never corrosive or silicone-based products.**
Stains	**Do not leave water, hot or coloured liquids (wine, juice) on the surface.**
Renovation	**Oiled: at least 1 coat of oil; varnished: at least 2 coats of varnish. Scratches: professional sanding then refinishing.**

COLOURS AND OPTIONS

Colors

- Beige

> **WARNING**
>
> Natural material: thickness, size (± 2 mm) and shade vary; order a room from a single batch. Traditional adhesive/grout or silicone must not be used.

Non-contractual document. Values are given for guidance; official documents are available on request.