
KITCHEN MOSAICS

Q Grade Purple

Q Grade Violet is a decorative glass mosaic, glossy finish.

THROUGH-COLOURED GLASS | VERRE | INTÉRIEUR | COLLAGE

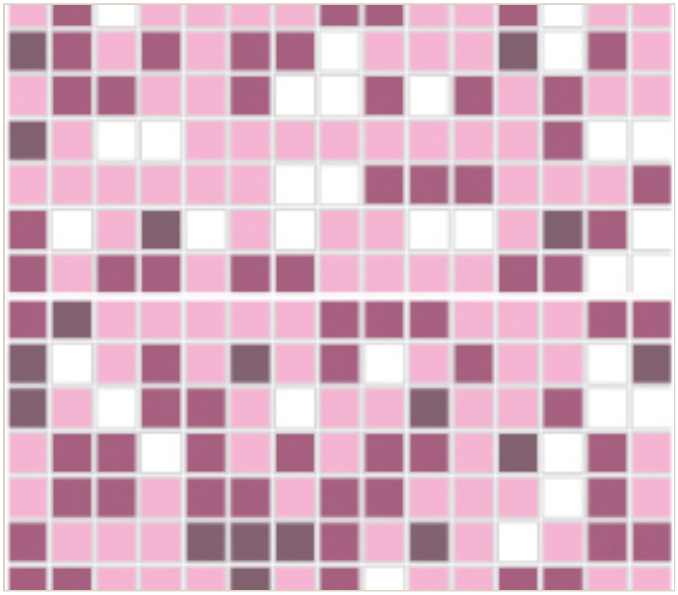

IDENTIFICATION

Dartank reference	**D4M09**
Dartank EAN	**3701839329269**
Material	**Through-coloured glass**
Colors	**Violet**
Format	**32,7×263 cm**
Thickness	**4 mm**
Pieces / m²	**1.16**
Sales unit	**Piece**

OVERVIEW

Overview

Glass coloured right through or quartz glass: the colour does not wear off and the mosaic can be laid on walls and floors, even in pools and fountains.

KEY BENEFITS

01
Lasting colour
Colour through the body, wear-proof.

02
Pools
Suitable for pools and fountains.

03
Walls and floors
Can be laid on indoor walls and floors.

04
Non-porous
Zero water absorption.

05
Frost resistant
Material declared frost resistant.

06
Hygiene certified
Hygienic certificate from a national public health institute.

PRODUCT CHARACTERISTICS

Material	**Verre**
Finish	**Brillant**
Application	**Intérieur**
Installation	**collage**
Element	**20×20 mm**
Absorption	**0%**
Joint	**2 mm**
Weight	**0,7 kg**

THE MATERIAL

Through-coloured glass

Through-coloured or quartz glass mosaic for walls, floors and pools.

Material	**Through-coloured glass or quartz glass, depending on range**
Dimensional tolerance	**± 2 mm (natural material, variations possible) mm**
Floor use	**Yes**
Pools and fountains	**Yes**

PERFORMANCE AND TEST RESULTS

Property	Standard	Result
Water absorption		**0 % %**
Wet areas		**Suitable for areas directly exposed to water (shower, splashback)**
Frost resistance		**Resistant**

TECHNICAL DOCUMENTS

PZH

Hygienic certificate

2026

On request

INSTALLATION

INSTALLER	SUBSTRATE	PRIMER	BATCH
Installation by a qualified professional, following good building practice.	Dry, flat, clean, degreased and dust-free.	Apply a primer with a roller or brush; in very humid rooms use a waterproofing primer.	Order the area for one room from a single batch and check quality, size and shade before installing.

Installation

1. **1** Cut with an angle grinder and diamond blade or with wheeled glass nippers; drill round holes with a diamond glass bit.
2. **2** Bond with a white flexible adhesive mortar for glass mosaic; dark shades may be laid on grey mortar. Test first.
3. **3** Spread the adhesive with a notched trowel (thickness per adhesive maker) in parallel ridges; lay into fresh adhesive pressing evenly. No spot bonding.
4. **4** Do not butt-joint: press the sheets onto the wall and separate them with spacers.
5. **5** Seal corners, wall/floor junctions and penetrations (taps) with a flexible joint (silicone, polymer) or a profile; follow substrate movement joints and use expansion profiles on large areas.
6. **6** Remove all adhesive from the surface, tools and hands; no residue may remain on the mosaic. Do not use for 24 h.
7. **7** Face-papered mosaic: 24 h after laying, moisten the paper with a sponge and peel it off, then grout.
8. **8** Use only fine-grain grout for glass mosaic.
9. **9** Grout no earlier than 24 h after bonding, with a rubber float, working in several directions to fill every gap; the joint may be flush or slightly recessed.
10. **10** Clean the surface with a clean damp sponge. Do not use for 24 h.

MAINTENANCE

Care and maintenance

Products	**Only cleaners for glass surfaces, per their instructions.**
Method	**Soft non-scratch cloth; do not let the cleaner dry on the surface.**

COLOURS AND OPTIONS

Colors

- Violet

Non-contractual document. Values are given for guidance; official documents are available on request.