
KITCHEN MOSAICS

Vitrum 001

Vitrum 001 is a decorative mirror glass mosaic, glossy finish.

MIRROR GLASS | MIROIR | INTÉRIEUR | COLLAGE

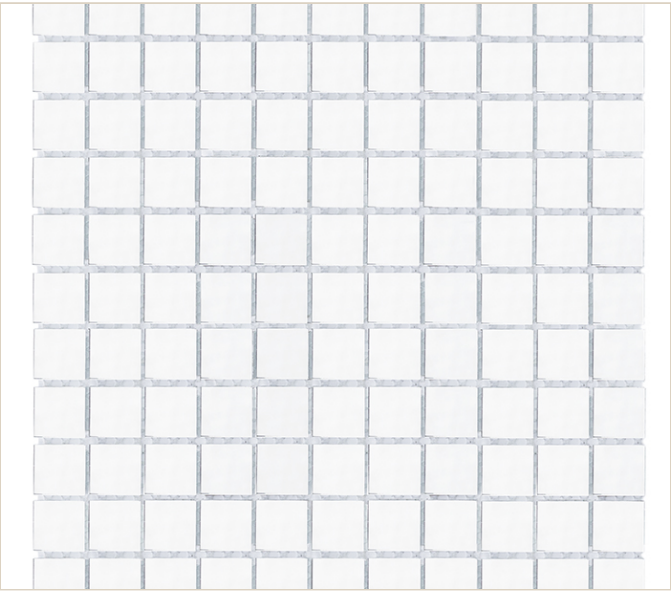

IDENTIFICATION

Dartank reference	**D4M42**
Dartank EAN	**3701839325735**
Material	**Mirror glass**
Colors	**Argent**
Format	**30×30 cm**
Thickness	**5 mm**
Pieces / m²	**11.11**
Sales unit	**Piece**

OVERVIEW

Overview

Mirror-backed glass tesserae that reflect light and visually enlarge the room: hallways, living rooms, headboards, feature partitions.

KEY BENEFITS

01
Mirror effect
Reflects light and enlarges the room.

02
Float glass
Smooth, flat surface.

03
Non-porous
Zero water absorption.

04
Decorative
Ideal for accent walls and small areas.

05
Easy care
Glass cleaner and soft cloth.

06
Easy cutting
Glass nippers or diamond blade.

PRODUCT CHARACTERISTICS

Material	**Miroir**
Finish	**Brillant**
Application	**Intérieur**
Installation	**collage**
Element	**25×25 mm**
Absorption	**0%**
Joint	**2 mm**
Weight	**0,7 kg**

THE MATERIAL

Mirror glass

Float glass mosaic with mirror backing, for decorative indoor walls.

Material	**Soda-lime float glass with reflective backing**
Dimensional tolerance	**± 2 mm (natural material, variations possible) mm**

PERFORMANCE AND TEST RESULTS

Property	Standard	Result
Water absorption		**0 % %**
Wet areas		**Not for permanent water exposure**

TECHNICAL DOCUMENTS

PZH

Hygienic certificate

2026

On request

INSTALLATION

INSTALLER	SUBSTRATE	PRIMER	BATCH
Installation by a qualified professional, following good building practice.	Dry, flat, clean, degreased and dust-free.	Apply a primer with a roller or brush; in very humid rooms use a waterproofing primer.	Order the area for one room from a single batch and check quality, size and shade before installing.

Installation

1. **1** Cut with an angle grinder and diamond blade or with wheeled glass nippers; drill round holes with a diamond glass bit.
2. **2** Bond only with white or clear mirror silicone adhesive; test first to check that adhesive or grout causes no discoloration.
3. **3** Spread the adhesive with a notched trowel (thickness per adhesive maker) in parallel ridges; lay into fresh adhesive pressing evenly. No spot bonding.
4. **4** Do not butt-joint: press the sheets onto the wall and separate them with spacers.
5. **5** Seal corners, wall/floor junctions and penetrations (taps) with a flexible joint (silicone, polymer) or a profile; follow substrate movement joints and use expansion profiles on large areas.
6. **6** Remove all adhesive from the surface, tools and hands; no residue may remain on the mosaic. Do not use for 24 h.
7. **7** Use only fine-grain grout for glass mosaic.
8. **8** Grout no earlier than 24 h after bonding, with a rubber float, working in several directions to fill every gap; the joint may be flush or slightly recessed.
9. **9** Clean the surface with a clean damp sponge. Do not use for 24 h.

MAINTENANCE

Care and maintenance

Products	**Only cleaners for glass surfaces, per their instructions.**
Method	**Soft non-scratch cloth; do not let the cleaner dry on the surface.**

COLOURS AND OPTIONS

Colors

- Argent

> **WARNING**
>
> Do not install in areas permanently exposed to water (inside showers, pools). Never use standard cement adhesive.

Non-contractual document. Values are given for guidance; official documents are available on request.