
BESPOKE SKIRTING BOARDS

Wall moulding 200 × 8 × 1.7 cm

Wall moulding

POLYSTYRENE-CORE PLASTERBOARD

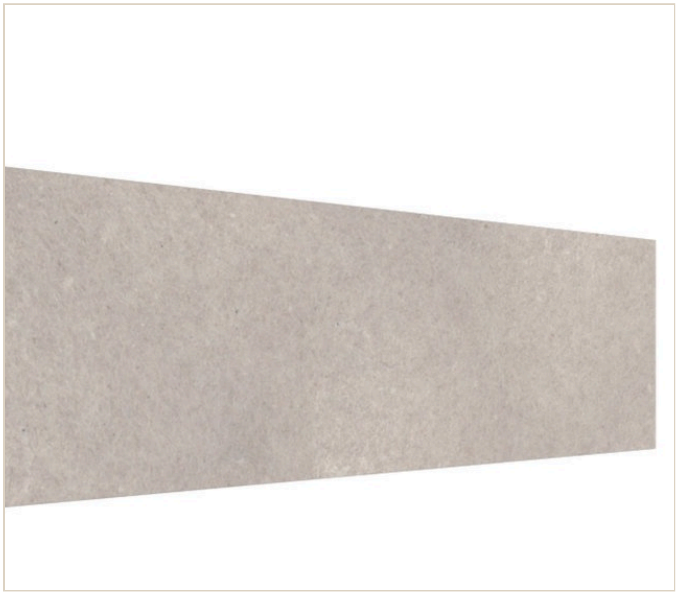

IDENTIFICATION

Dartank reference	**D8PL141**
Dartank EAN	**3701839304075**
Material	**Polystyrene-core plasterboard**
Sales unit	**Linear metre**

OVERVIEW

Overview

Ready-to-fit plasterboard modules that blend into the wall like built work: invisible taped joints, finish of your choice, optional LED lighting.

KEY BENEFITS

01
Built-in look
Invisible taped joints, a built-work finish.

02
Any finish
Paint, render, wallpaper or tiles.

03
Ready to fit
Prefabricated modules, trimmable with a saw.

04
Secure fixing
Metal brackets, adhesive and screws.

05
LED-ready
Versions designed to take an LED strip.

06
Forgiving
Absorbs substrate deviations up to 10 mm.

THE MATERIAL

Polystyrene-core plasterboard

Prefabricated plasterboard elements on a polystyrene core: skirting, profiles, slats, curtain pelmets and lit trims, to be painted, rendered, papered or tiled.

Application	**Interior**
Composition	**Plasterboard on a polystyrene core**
Plasterboard thickness	**12.5 mm**
Installation method	**Metal brackets, gypsum adhesive in dabs every 15 cm and side screwing**
Compatible paints	**Solvent-free water-based paint**
Possible finishes	**Paint, decorative render, wallpaper or tiles**

INSTALLATION

Installation

1. **1. Prepare** Unpack the modules, remove film and inserts. Trim with a saw if needed and lightly sand the edges. Prime the wall.
2. **2. Mark out** Offer up the modules and mark the lines, allowing for the board thickness (12.5 mm).
3. **3. Fix brackets** Screw the metal brackets to the wall (U for boxes, L for others): one at each joint and at least one per side every 2 m.
4. **4. Bond and screw** Apply gypsum adhesive in dabs every 15 cm on the core, press the module onto the brackets, adjust and screw from the side (screws not supplied).
5. **5. Joints** Bond the core edges between modules, tape the joints (non-woven tape and flexible jointing compound), sand. Small deviations up to 10 mm can be corrected.
6. **6. Finish** Paint, render, paper or tile the surface.

MAINTENANCE

Care and maintenance

Routine	**No special maintenance. Dust with a broom or a vacuum cleaner fitted with a clean soft brush.**
Lacquered surfaces	**Versions with a factory lacquer finish can be cleaned with a damp cloth, water or an alcohol-free cleaner.**

QUANTITIES

VARIANTS — 6

VARIANT	REF.
Moulure murale D8CA26	D8CA26
Moulure murale D8CA27	D8CA27
Moulure murale 200 × 5 × 1,7 cm	D8PL140
Moulure murale D8PL142	D8PL142
Moulure murale D8PL143	D8PL143
Moulure murale 200 × 23 × 1,7 cm	D8PL144

WARNING

Solvent-based paints are prohibited: use a water-based paint. Do not use silicone sealant at junctions.

Non-contractual document. Values are given for guidance; official documents are available on request.