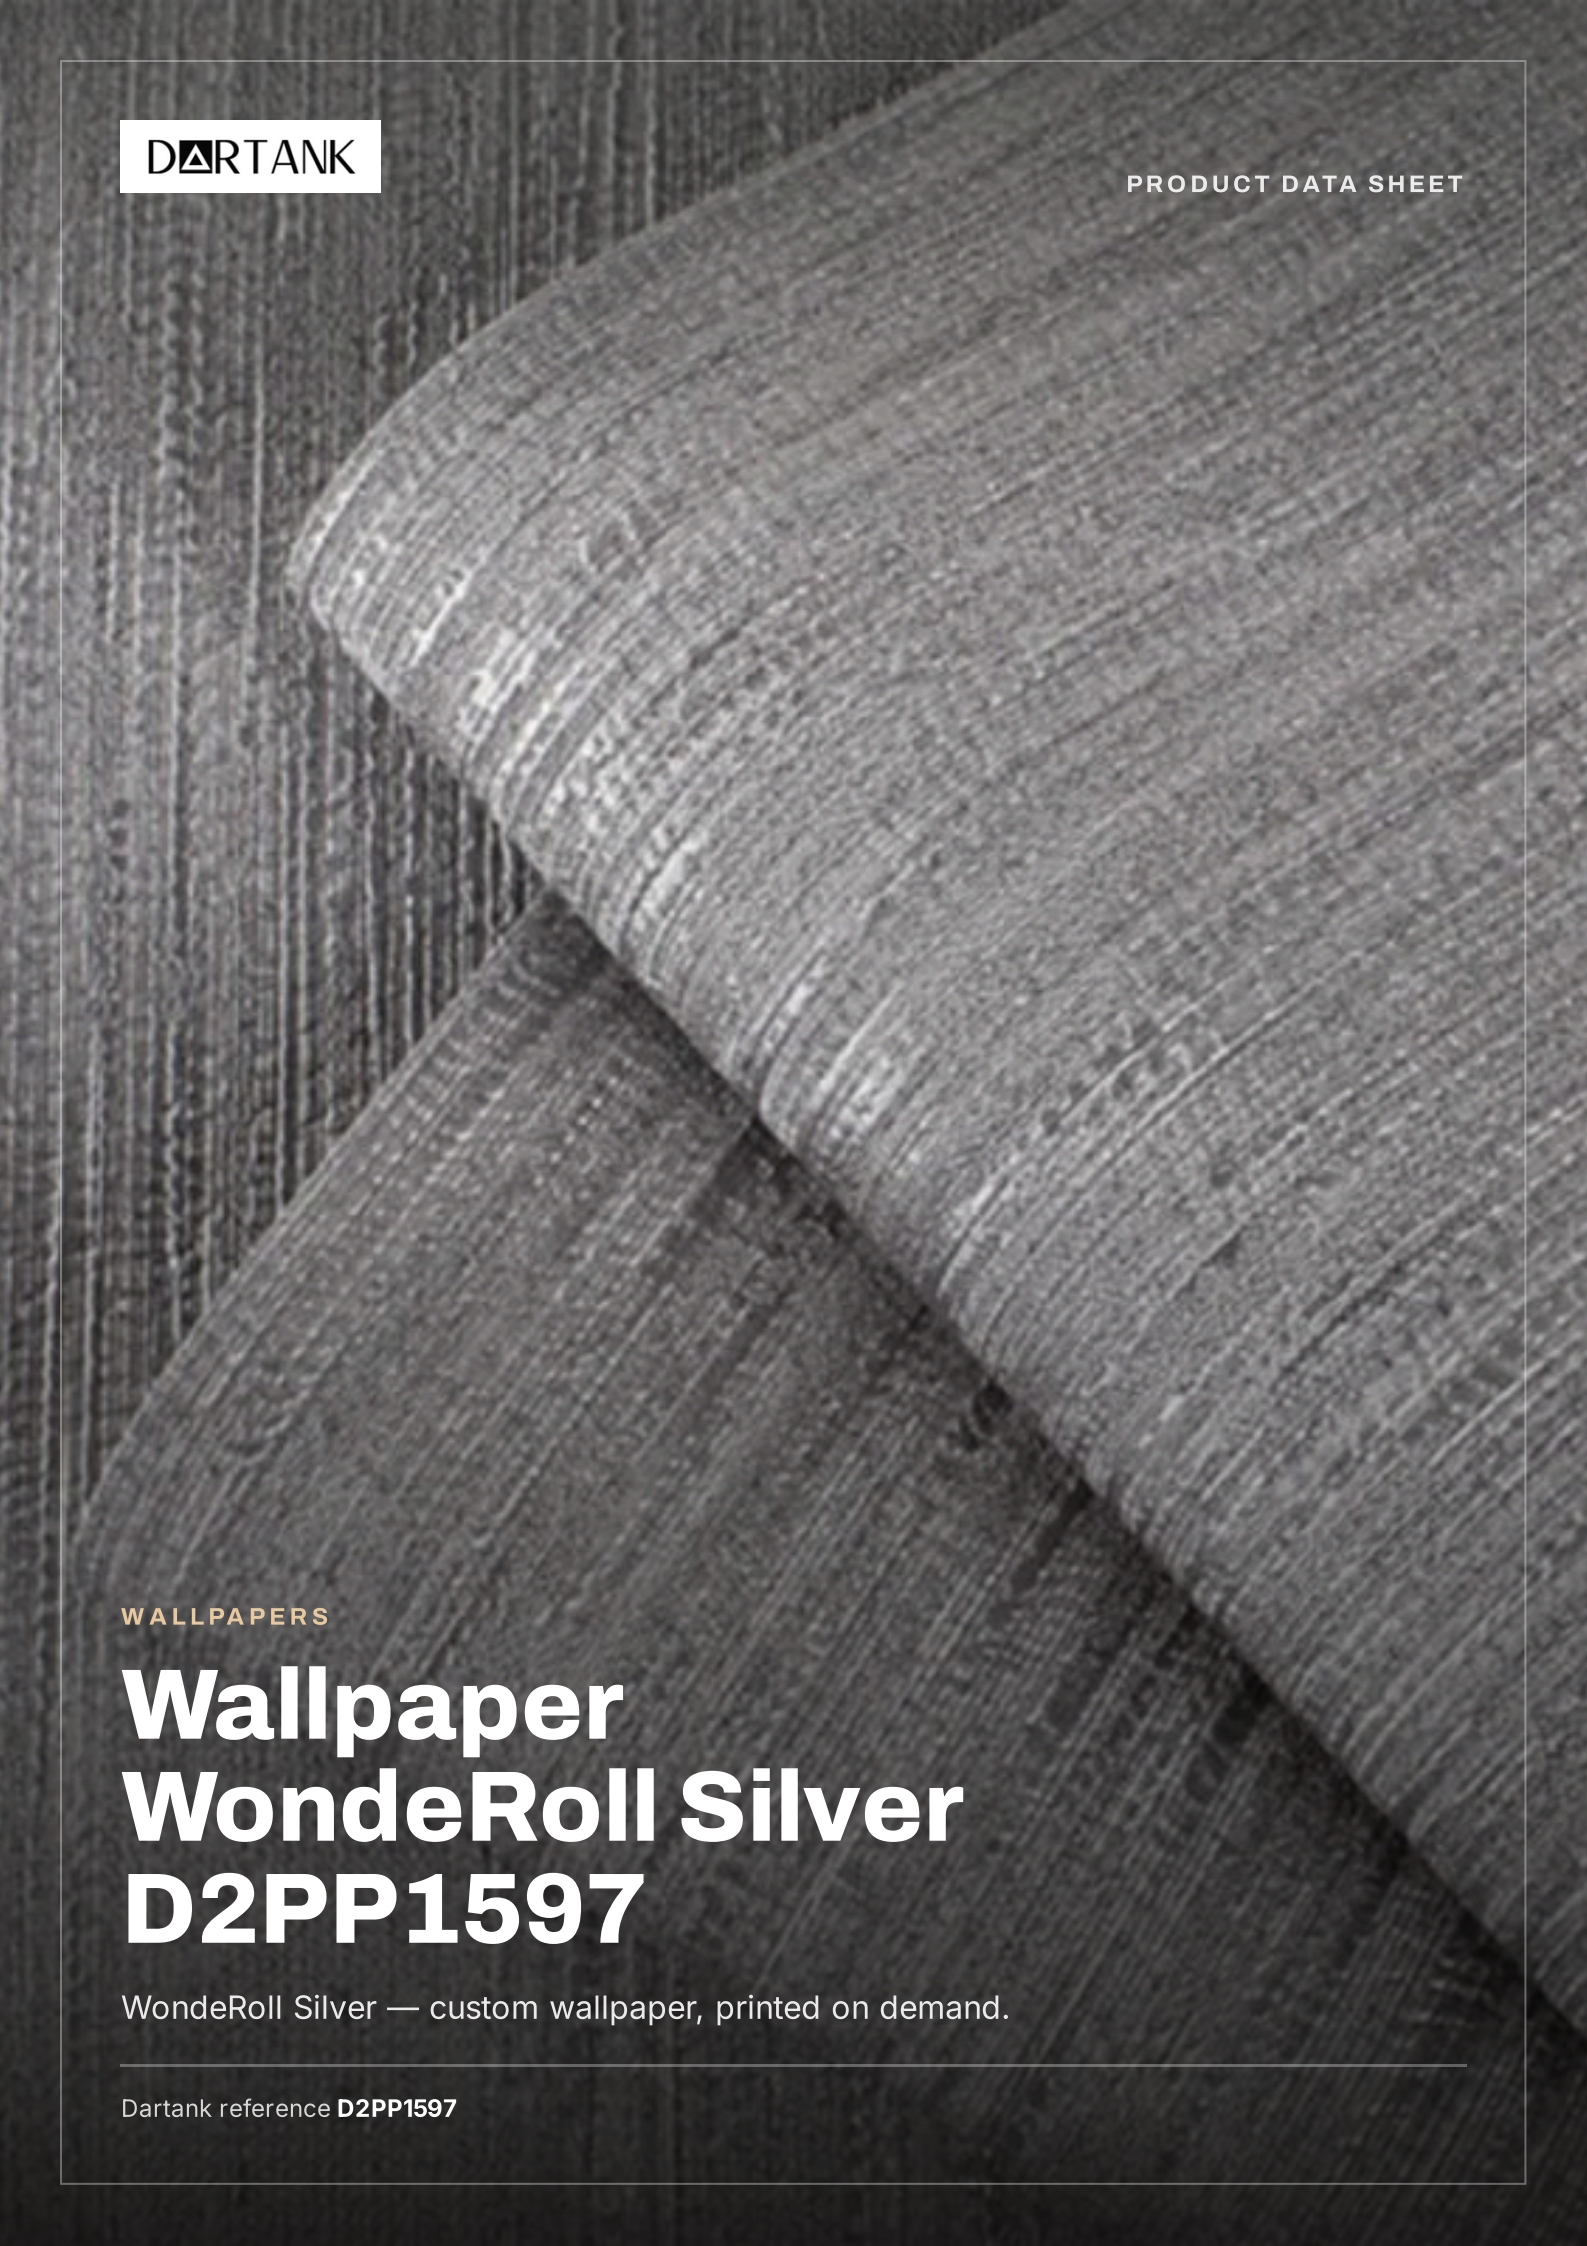


DARTANK

PRODUCT DATA SHEET

WALLPAPERS

# Wallpaper WondeRoll Silver D2PP1597

WondeRoll Silver — custom wallpaper, printed on demand.

Dartank reference **D2PP1597**


WALLPAPER ROLLS

# Wallpaper WondeRoll Silver D2PP1597

WondeRoll Silver — custom wallpaper, printed on demand.

MADE-TO-MEASURE PRINTED WALLPAPER, TEXTURED VINYL ON NON-WOVEN | INTÉRIEUR

COLLAGE

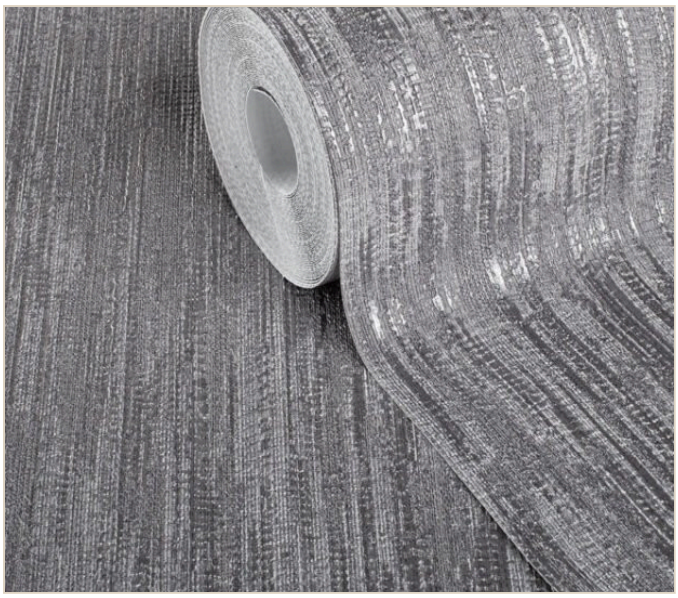

## IDENTIFICATION

| | |
|---|---|
| Dartank reference | **D2PP1597** |
| Dartank EAN | **3701839339121** |
| Material | **Made-to-measure printed wallpaper, textured vinyl on non-woven** |
| Sales unit | **Square metre (m²)** |
| Backing | **Intissé lisse** |

OVERVIEW

## Overview

Digital wallpaper printed to order, to the exact size of the wall or as full rolls. As standard it is printed on non-woven coated with textured hard vinyl, in a choice of 15 embossed textures; smooth non-woven and glass-fibre versions are also available. Standard strips are 100 or 102 cm wide; on made-to-measure orders an edge strip may be narrower.

## KEY BENEFITS

**01**

### Made to measure

Printed to order to the exact size of the wall.

**02**

### 15 embossed textures

Linen, bouclé, marble, stone, stucco… or smooth non-woven.

**03**

### Hard vinyl

Standard version on hard-vinyl-coated non-woven, durable in everyday use.

**04**

### Paste-the-wall

The dry strip is hung butt-jointed onto the pasted wall.

**05**

### Kitchens and bathrooms

With the protective resin the décor withstands water, heat and chemicals.

**06**

### Coordinated colours

Each design comes with matching paint colours.

## PRODUCT CHARACTERISTICS

| | |
|---|---|
| Backing | **Intissé lisse** |
| Application | **Intérieur** |
| Installation | **collage** |

## THE MATERIAL

### Made-to-measure printed wallpaper, textured vinyl on non-woven

Décor printed to order on non-woven coated with textured hard vinyl; smooth non-woven and glass-fibre versions available.

| | |
|---|---|
| Composition | **Non-woven coated with hard vinyl (standard version)** |
| Intended use | **Interior walls in dry rooms; kitchens and bathrooms with protective resin** |
| Print substrate options | **Non-woven + textured vinyl (standard, 253 to 325 g/m²); smooth non-woven (110 g/m²); glass fibre (200 g/m²)** |
| Backing | **Non-woven** |
| Appearance / finish | **15 embossed textures (linen, bouclé, feather, marble, batiste, sandstone, plaster, stone, stucco, pleated, matt, old stone, cotton, silver, gold) or smooth non-woven; one recommended texture per design** |
| Weight per m² | **253–325 g/m²** |
| Application temperature | **18–25 °C** |
| Strip width | **100–102 cm** |
| Pasting method | **Paste the wall only, strip hung dry** |
| Strip joining | **Butt-jointed, no overlap** |
| Adhesive | **Non-woven wallpaper adhesive (modified starch) in dry rooms** |
| Full adhesive drying time | **24 h** |

| | |
|---|---|
| Drying of new plaster or paint | 3 semaines ≈ |

## INSTALLATION

### SUBSTRATE
Dry, clean, degreased, smooth wall of a light, uniform colour; old wallpaper and flaking paint fully removed, holes and cracks filled with plaster, glossy surfaces sanded.

### PRIMER
Apply a deep-penetrating primer, preferably fungicidal, in two coats at least 24 h before hanging.

### NEW PLASTER AND PAINT
Allow about 3 weeks to dry before hanging.

### ROOM CONDITIONS
18 to 25 °C, no draughts, air conditioning, auxiliary heaters or sudden temperature changes, during installation and for at least 24 h afterwards.

### SITE
Hang last, in a clean room: sockets removed, radiators taken down, holes drilled, acrylic sealing of skirtings and joinery done and adjacent walls painted beforehand.

### Installation

1. **1. Check** Unroll all strips side by side and check pattern, shade, dimensions and condition; report any discrepancy before installing.
2. **2. Marking out** Draw a plumb line with a spirit or laser level, one strip width from the starting point, and mark the position of each strip.
3. **3. Pasting the wall** Apply adhesive to the wall with a roller or brush in a thin, even coat slightly wider than the strip; very thin at the edges to avoid squeeze-out. Never paste the strip.
4. **4. Hanging** Apply the dry strip from the top against the plumb line, then smooth it with a roller or soft brush from the centre outwards to remove air.
5. **5. Next strips** Hang the following strips, matching the pattern carefully; never place a joint in a corner or on an edge.
6. **6. Cleaning** Wipe off any adhesive immediately with a clean, slightly damp sponge or cloth; never let adhesive dry on the decorative face.
7. **7. Trimming** Trim the excess at top and bottom with a sharp utility knife guided by a metal spatula.
8. **8. Repositioning** Never slide a strip once stuck: if misplaced, peel it off and hang it again.

## QUANTITIES

### COVERAGE PER M² — 8% cutting waste

| AREA | BILLED |
|---|---|
| 5 m² | 5.4 m² |
| 10 m² | 10.8 m² |
| 20 m² | 21.6 m² |
| 50 m² | 54 m² |

## COLOURS AND OPTIONS

### Compatible paints

Grey Tote | Mushrom Cap | Nutbrown | Spectral | Spellbound | Titanium Neutrals | Warm White | Wonderwall White

### PRECAUTIONS

- **Adhesive and damp rooms** The recommended adhesive is for walls in dry rooms only; in kitchens or bathrooms use a suitable adhesive and the protective resin.
- **Shower area** No dedicated system for areas directly exposed to water (showers): installation at your own risk.

Non-contractual document. Values are given for guidance; official documents are available on request.